



dimension

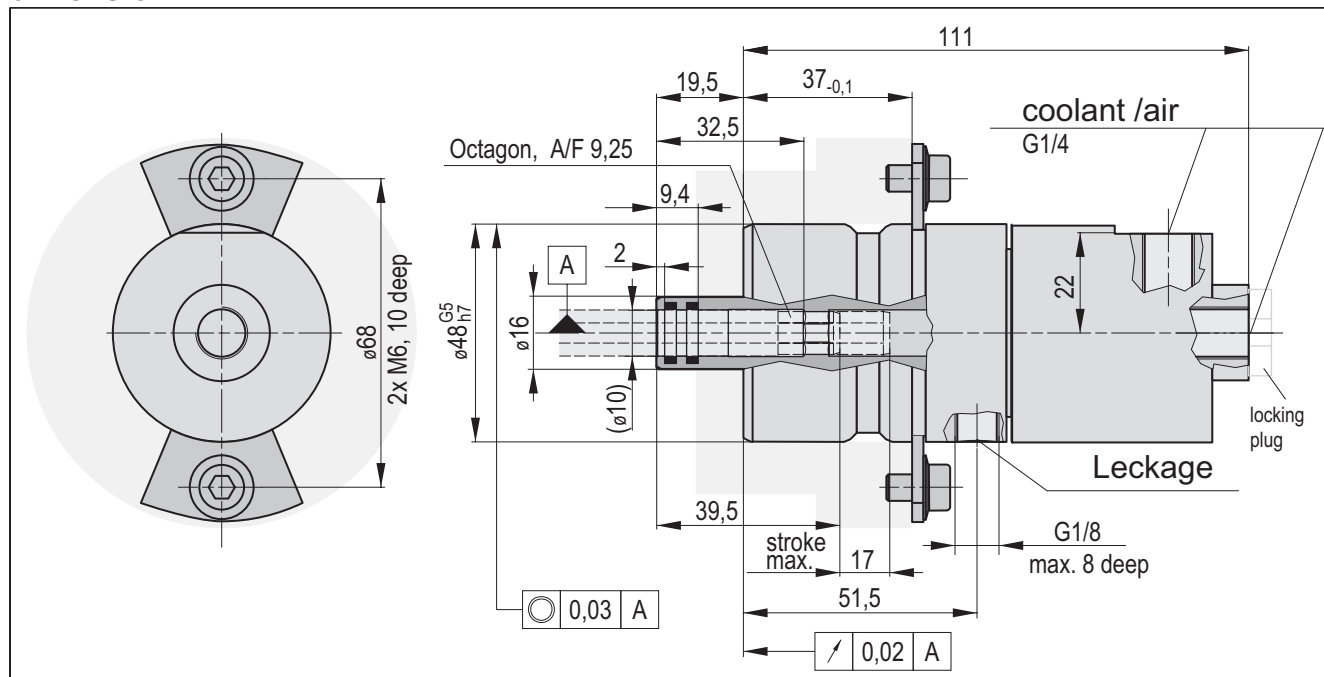

technical data

spindle speed max. 24000 min⁻¹
 coolant pressure max. 80 bar
 cleaning air max.; n = 0 min⁻¹ 10 bar
 pressure air max.; n < 10000 min⁻¹ 5 bar
 (per discussion)
 required media purity
 according ISO 4406 -/17/14
 filter grade < 50 μ m

flow volume

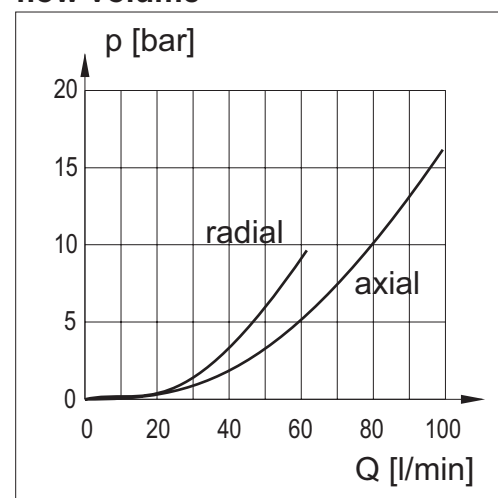

features

- hybrid bearing
- balanced design
- closed sealing surface
- coolant
- minimum volume lubrication (mixed externally) $p_{\max} = 5$ bar
- dry operation
- axial or radial connection
- passage min. $\phi 8$ mm

code	3	4
order number	95.250.033.2.0	

Subject to modification due to technical advance!

95.100.257.D.E / 2007-07